



WeatherMaker[®]



Stock Catalog | WeatherMaker[®]





- 24/7 access to product information
- Real-time inventory and pricing
- Place orders anytime, anywhere

Get started in 3 simple steps!

1. Request a login from your Sales Rep
2. Set up your SINGLE SOURCE account
3. Start placing orders online

What can SINGLE SOURCE do for you?

24/7 ACCESS


- Place orders anytime, anywhere
- Check local inventory and pricing without making a phone call
- Never wait on hold

PRODUCT DATA

- Fast and easy product look-up
- Access product manuals, replacement part lists, and technical specifications
- Search all parts, supplies and equipment with ease

JOB COSTING

- Attach purchase order numbers to web orders and keep your jobs organized under your account
- Create new wishlists for items you order all the time
- Upload your orders as spreadsheets
- Search order history fast and easy

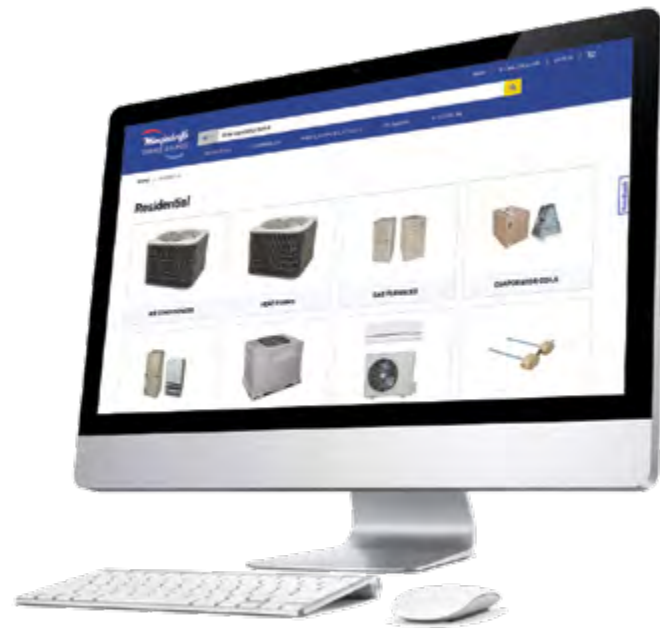

Scan QR code using your phone's camera to log to visit now



MOBILE ACCESS

- Built for desktop, mobile and tablet compatibility
- Optimized for any device to drive your business on the go
- Search local inventory based on your geolocation

RELIABILITY & CONTROL

- Tested to enhance your business work-flow
- Create admin accounts for your employees based on their role and control their individual access

LOGISTICS

- Know what you're getting, where it's coming from, and when you'll get it
- See product availability at all Mingledorff's locations
- Avoid shipping fees with in-store pickup options or request delivery during checkout



Table of Contents

Air Conditioners 4

Heat Pumps 5


Gas Furnaces 6 – 7

Fan Coils 8

Evaporator Coils 9 – 12

Packaged Units 13 – 14

Ductless 15 – 18

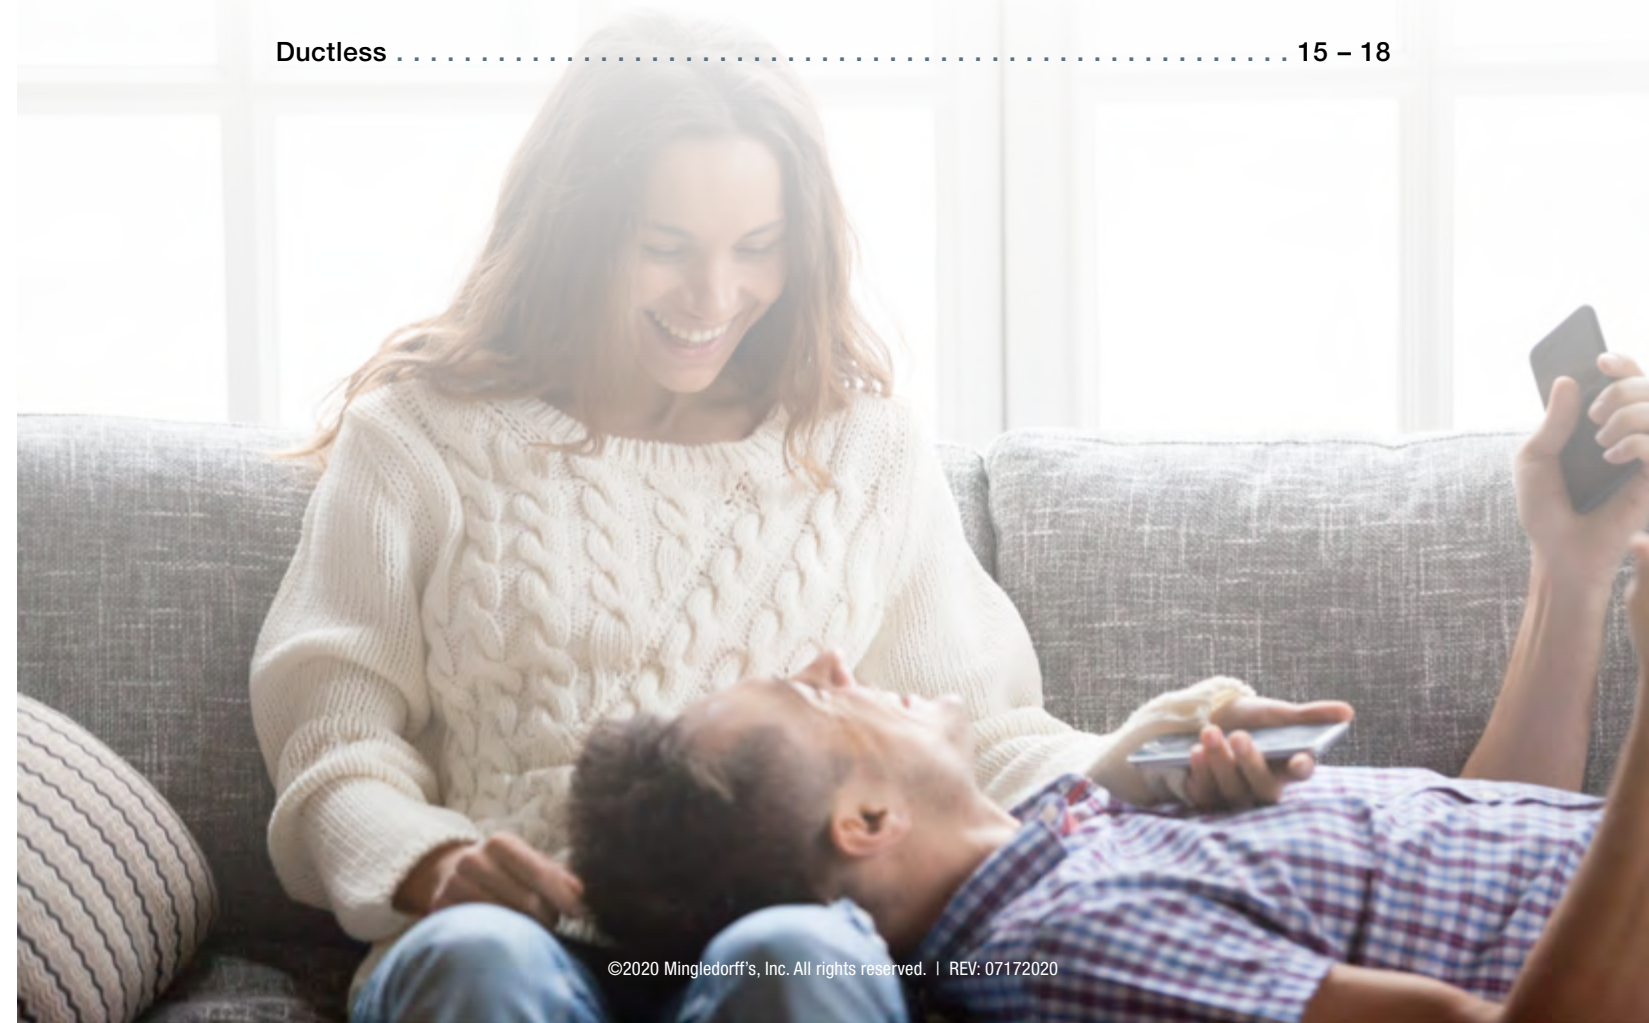



Efficiency

- 14.0 SEER / 11.7 – 12.0 EER
- Microtube Technology™ refrigeration system
- Energy Star® combinations

Reliability

- Puron® R-410A refrigerant pre-charged
- Scroll compressor
- Internal pressure relief valve
- Internal thermal overload
- Filter drier

Durability

- Solid, durable sheet metal construction
- Dense wire coil guard

Applications

- Long-line – up to 250 feet (76.20 m) total equivalent length, up to 200 feet (60.96 m) condenser above evaporator, or up to 80 ft. (24.38 m) evaporator above condenser (See Longline Guide for more information.)
- Low ambient (down to -20_F/-28.9_C) with accessory kit

Limited Warranty*

- 10-year limited to original purchaser on compressor and parts upon timely registration, otherwise 5 years. * For residential applications. See warranty for full details.

Accessories

PART NUMBER	DESCRIPTION
KSATX0201PUR	R410-A, TXV-024-030, HP or A/C
KSATX0301PUR	R410-A, TXV-036 - 042, HP or A/C
KSATX0401PUR	R410-A, TXV- 048, HP or A/C
KSATX0501PUR	R410-A, TXV- 060, HP or A/C

Specifications

MODEL NUMBER	NOMINAL COOLING SIZE	VOLT-PHASE (60 HZ)	TUBE CONNECTIONS (OD.)		UNIT DIMENSIONS (IN.)			APPROX. SHIP WT (LB)
			LIQUID LINE	SUCTION LINE	WIDTH	DEPTH	HEIGHT	
PA14NC01800G	1.5	208-230-1	3/8"	3/4"	23-1/8"	23-1/8"	24-7/8"	134
PA14NC02400G	2	208-230-1	3/8"	3/4"	25-3/4"	25-3/4"	25-5/16"	140
PA14NC03000G	2.5	208-230-1	3/8"	3/4"	31-3/16"	31-3/16"	31-11/16"	186
PA14NC03600G	3	208-230-1	3/8"	7/8"	31-3/16"	31-3/16"	24-7/8"	151
PA14NC04200G	3.5	208-230-1	3/8"	7/8"	31-3/16"	31-3/16"	38-7/16"	232
PA14NC04800G	4	208-230-1	3/8"	7/8"	31-3/16"	31-3/16"	28-1/4"	200
PA14NC06000G	5	208-230-1	3/8"	1-1/8"	31-3/16"	31-3/16"	31-11/16"	218



Efficiency

- 14.0 SEER / 11.5 – 11.7 EER / 8.2 HSPF
- Microtube Technology™ refrigeration system
- Energy Star® combinations

Sound

- Sound level as low as 69 dBA

Reliability

- Puron® R-410A refrigerant pre-charged
- Scroll compressor
- Internal pressure relief valve
- Internal thermal overload
- Loss of charge switch
- Filter drier
- Balanced refrigeration system for maximum reliability

Durability

- Solid, durable sheet metal construction
- Dense wire coil guard

Applications

- Long-line – up to 250 feet (76.20 m) total equivalent length, up to 200 feet (60.96 m) condenser above evaporator, or up to 80 ft. (24.38 m) evaporator above condenser (See Longline Guide for more information.)
- Low ambient (down to -20_F/-28.9_C) with accessory kit

Limited Warranty*

- 10-year limited to original purchaser on compressor and parts upon timely registration, otherwise 5 years. * For residential applications. See warranty for full details.

Accessories

PART NUMBER	DESCRIPTION
KSATX0201PUR	R410-A, TXV-024-030, HP or A/C
KSATX0301PUR	R410-A, TXV-036 - 042, HP or A/C
KSATX0401PUR	R410-A, TXV- 048, HP or A/C
KSATX0501PUR	R410-A, TXV- 060, HP or A/C

Specifications

MODEL NUMBER	TONNAGE	VOLT-PHASE (60 HZ)	TUBE CONNECTIONS (OD.)		UNIT DIMENSIONS (IN.)			APPROX. SHIP WT (LB)
			LIQUID LINE	SUCTION LINE	WIDTH	DEPTH	HEIGHT	
PH14NB018POG	1.5	208-230-1	3/8"	5/8"	23-1/8"	23-1/8"	35-1/16"	166
PH14NB024POG	2	208-230-1	3/8"	5/8"	25-3/4"	25-3/4"	35-1/2"	175
PH14NB030POG	2.5	208-230-1	3/8"	3/4"	31-3/16"	31-3/16"	31-11/16"	180
PH14NB036POG	3	208-230-1	3/8"	3/4"	31-3/16"	31-3/16"	28-1/4"	201
PH14NB042POG	3.5	208-230-1	3/8"	7/8"	31-3/16"	31-3/16"	38-7/16"	235
PH14NB048POG	4	208-230-1	3/8"	7/8"	31-3/16"	31-3/16"	28-1/4"	232
PH14NB060POG	5	208-230-1	3/8"	1-1/8"	31-3/16"	31-3/16"	31-11/16"	248



Standard Features

- Single stage gas valve
- Fixed Speeds, Constant Torque (FCT) ECM blower motor
- LED diagnostics and self test feature
- Hot surface ignition
- Draft safeguard switch to ensure proper furnace venting
- Inner door for tighter sealing
- 4-way Multipoise furnace, 13 vent applications
- Dual Fuel System compatible
- All models are chimney friendly when used with accessory vent kit
- Propane convertible with gas conversion accessory
- Cabinet air leakage less than 2.0% at 1.0 in. W.C. and cabinet air leakage less than 1.4% at 0.5 in. W.C. when tested in accordance with ASHRAE standard 193
- 4" Vent Connection

Limited Warranty*

- 20-year warranty on heat exchanger
 - 10-year limited to original purchaser upon timely registration, otherwise 5 yrs
- * For residential applications. See warranty for full details.



Accessories

PART NUMBER	DESCRIPTION
AGATWNDTE01A	Twinning Kit for PG80ES
AGAGC8NPS01A	LP Kit for PG80 Furnace

Specifications

MODEL NUMBER	RATED HEATING INPUT (BTUH)* (UPFLOW/DOWNFLOW)	RATED HEATING OUTPUT (BTUH) †	SELECTABLE COOLING CFM @ 0.5 ESP MAX / MIN †	UNIT DIMENSIONS (IN.)			APPROX. SHIP WT (LB)
				WIDTH	HEIGHT	DEPTH	
PG80ESAA36045A	44,000	36,000	1,080 / 415	14-3/16"	33-1/3"	29"	104
PG80ESAA36045B	44,000	35,000	1,215 / 320	17-1/2"	33-1/3"	29"	119
PG80ESAA36070A	66,000	54,000	1,070 / 315	14-3/16"	33-1/3"	29"	114
PG80ESAA36070B	66,000	54,000	1,990 / 815	17-1/2"	33-1/3"	29"	120
PG80ESAA42090B	88,000	71,000	1,990 / 815	17-1/2"	33-1/3"	29"	131
PG80ESAA48070B	66,000	54,000	1,515 / 915	17-1/2"	33-1/3"	29"	125
PG80ESAA48090C	88,000	71,000	1,545 / 940	21"	33-1/3"	29"	137
PG80ESAA60110C	110,000	90,000	2,040 / 990	21"	33-1/3"	29"	146
PG80ESAA60110D	110,000	90,000	2,005 / 820	24-1/2"	33-1/3"	29"	161

* Gas input ratings are certified for elevations to 2000 ft

† Capacity and ratings in accordance with U.S. Government DOE test procedures with isolated combustion system.



Standard Features

- Fixed-speeds, constant torque (FCT) ECM blower motor for electrically efficient operation all year long in heating cooling and continuous fan operation.
- Single-speed inducer motor, and single-stage gas valve
- Silicon nitride robust hot surface ignition
- Adjustable blower speed for heating and cooling
- Aluminized-steel primary heat exchanger
- Stainless-steel condensing secondary heat exchanger
- 4-way multipoise design for upflow, downflow or horizontal installation, with unique vent elbow for 12 different venting options, including optional venting through-the-cabinet downflow venting capability
- Factory-configured ready for upflow applications
- Ideal height 35-in. cabinet: short enough for taller coils but still allows enough room for service
- Direct-vent/sealed combustion, single-pipe venting or ventilated combustion air
- Approved for Manufactured Housing/Mobile Home applications with MH accessory kit.
- Propane convertible with gas conversion accessory
- All sizes meet ENERGY STAR® South regional standards
- Cabinet air leakage less than 2.0% at 1.0 in. W.C. and cabinet air leakage less than 1.4% at 0.5 in. W.C. when tested in accordance with ASHRAE standard 193.

Limited Warranty*

- 20-year warranty on heat exchanger
- 10-year limited to original purchaser upon timely registration, otherwise 5 yrs

* For residential applications. See warranty for full details.



Specifications

MODEL NUMBER	RATED HEATING INPUT (BTUH)* (UPFLOW/DOWNFLOW)	RATED HEATING OUTPUT (BTUH) †	COOLING CFM @ 0.5 ESP	UNIT DIMENSIONS (IN.)			APPROX. SHIP WT (LB)
				WIDTH	HEIGHT	DEPTH	
PG92ESAA30040A	40,000	37,000	985	14-3/16"	35"	29-1/2"	121
PG92ESAA42060B	60,000	56,000	1,190	17-1/2"	35"	29-1/2"	142
PG92ESAA60080C	80,000	75,000	1,460	21"	35"	29-1/2"	150
PG92ESAA60100C	100,000	93,000	1,675	21"	35"	29-1/2"	160

* Gas input ratings are certified for elevations to 2000 ft

† Capacity and ratings in accordance with U.S. Government DOE test procedures with isolated combustion system.



Standard Features

- Puron® R-410A refrigerant compatible
- Multi-tap ECM (electronic commutating motor) motors - all sizes
- Integrated motor controls, with 90-sec off TDR function, have replaced integrated circuit board
- Five available speed taps to meet a wide range of applications
- Large, grooved tube, louvered fin coils
- Efficient, quiet, time-tested blower housings and diffusers
- Sturdy, drainable condensate pans
- Cabinet construction features innovations designed to prevent cabinet sweating
- Tested for condensate disposal in much tougher conditions than Air Conditioning and Refrigeration Institute requirements
- Super-thick R-4.2 insulation with vapor barrier
- Pre-painted galvanized steel cabinet (taupe metallic)
- Installation-flexible, multipoise units
- Horizontal hanging provisions on cabinet
- No tools required to access filter
- Newly improved filter rack area filter door insulation added for improved air seal
- 5- through 20-kW accessory heaters - field installed
- Factory-supplied power plug
- Easy plug-in provisions for heater installation
- Entry options for high and low voltage wiring hook-up
- Leak-preventing sweat connections
- Thermostatic expansion valve, TXV, on all coils
- Designed for manufactured housing applications

Limited Warranty*

- 10-year limited to original purchaser upon timely registration, otherwise 5 yrs
- * For residential applications. See warranty for full details.



Electric Heater Kit

PART NUMBER	DESCRIPTION
FC-0501N05LC	5 KW Heat Kit
FC-0801N08LC	8 KW Heat Kit
FC-0901N10LC	10 KW Heat Kit
FC-3001F15LC	15 KW Heat Kit
FC-3201F20LC	20 KW Heat Kit (non-stock item)

Specifications

MODEL NUMBER	TONNAGE	EXPANSION DEVICE	TUBE CONNECTIONS (OD.)		UNIT DIMENSIONS (IN.)			APPROX. SHIP WT (LB)
			LIQUID LINE	SUCTION LINE	HEIGHT	WIDTH	DEPTH	
PF4MNP018L00	1.5	TXV	3/8"	5/8"	42-11/16"	14-15/16"	22-1/16"	112
PF4MNP025L00	2	TXV	3/8"	5/8"	49-5/8"	17-5/8"	22-1/16"	122
PF4MNP030L00	2.5	TXV	3/8"	3/4"	49-5/8"	17-5/8"	22-1/16"	122
PF4MNP036L00	3	TXV	3/8"	3/4"	49-5/8"	17-5/8"	22-1/16"	122
PF4MNP042L00	3.5	TXV	3/8"	7/8"	49-5/8"	21-1/8"	22-1/16"	157
PF4MNP048L00	4	TXV	3/8"	7/8"	49-5/8"	21-1/8"	22-1/16"	157
PF4MNP061L00	5	TXV	3/8"	7/8"	53-7/16"	21-1/8"	22-1/16"	175



Standard Features

- Puron® R-410A refrigerant compatible
- Factory-installed Puron refrigerant TXV
- Both upflow and downflow applications with one SKU
- Painted cabinets match taupe metallic furnace color
- High-tech fin technology
- Durable - sloped - drain pan
- Aluminum coils incorporate advanced manufacturing techniques to provide the next generation solution to coil corrosion, including formicary corrosion

Limited Warranty*

- 10-year limited to original purchaser upon timely registration, otherwise 5 years
- * For residential applications. See warranty for full details.



Specifications

MODEL NUMBER	TONNAGE	TUBE CONNECTIONS (OD.)		UNIT DIMENSIONS (IN.)			APPROX. SHIP WT (LB)
		LIQUID LINE	SUCTION LINE	WIDTH	HEIGHT	DEPTH	
CAPMP2414ALA	2	3/8"	5/8"	14-3/16"	14-5/8"	21"	39.5
CAPMP2417ALA	2	3/8"	5/8"	17-1/2"	14-5/8"	21"	39.5
CAPMP2517ALA	2.5	3/8"	3/4"	14-3/16"	17"	21"	46.5
CAPMP3014ALA	2.5	3/8"	3/4"	17-1/2"	17"	21"	47
CAPMP3017ALA	2.5	3/8"	3/4"	17-1/2"	23-1/4"	21"	46.3
CAPMP3614ALA	3	3/8"	3/4"	17-1/2"	19-13/16"	21"	48.5
CAPMP3617ALA	3	3/8"	7/8"	21"	17"	21"	48
CAPMP3717ALA	3	3/8"	7/8"	17-1/2"	27-3/16"	21"	45.2
CAPMP3721ALA	3.5	3/8"	7/8"	17-1/2"	21-1/8"	21"	52
CAPMP4221ALA	3.5	3/8"	7/8"	21"	21-13/16"	21"	62
CAPMP4321ALA	3.5	3/8"	7/8"	24-1/2"	26-5/16"	21"	58
CAPMP4821ALA	4	3/8"	7/8"	21"	24-7/8"	21"	71
CAPMP6121ALA	4	3/8"	7/8"	24-1/2"	22-1/16"	21"	62
CAPMP6024ALA	5	3/8"	7/8"	24-1/2"	29-1/8"	21"	78
CAPMP6124ALA	5	3/8"	7/8"	24-1/2"	32-7/16"	21"	83.5



Standard Features

- Puron® R-410A refrigerant compatible
- Factory-installed Puron refrigerant TXV
- Both upflow and downflow applications with one SKU
- Painted cabinets match taupe metallic furnace color
- High-tech fin technology
- Durable - sloped - drain pan
- Transition coil designed to match smaller furnace applications (CNPVT models)
- Aluminum coils incorporate advanced manufacturing techniques to provide the next generation solution to coil corrosion, including formicary corrosion

Limited Warranty*

- 10-year limited to original purchaser upon timely registration, otherwise 5 years
- * For residential applications. See warranty for full details.



Specifications

MODEL NUMBER	TONNAGE	TUBE CONNECTIONS (OD.)		UNIT DIMENSIONS (IN.)			APPROX. SHIP WT (LB)
		LIQUID LINE	SUCTION LINE	WIDTH	HEIGHT	DEPTH	
CNPVP2414ALA	2	3/8"	5/8"	14-3/16"	14-5/8"	21"	39.5
CNPVP2417ALA	2	3/8"	5/8"	17-1/2"	14-5/8"	21"	39.5
CNPVP3014ALA	2.5	3/8"	3/4"	14-3/16"	17"	21"	46.5
CNPVP3017ALA	2.5	3/8"	3/4"	17-1/2"	17"	21"	47
CNPVP3117ALA	2.5	3/8"	3/4"	17-1/2"	23-1/4"	21"	46.3
CNPVT3617ALA	3	3/8"	3/4"	17-1/2"	19-13/16"	21"	48.5
CNPVP3621ALA	3	3/8"	7/8"	21"	17"	21"	48
CNPVP3717ALA	3	3/8"	7/8"	17-1/2"	27-3/16"	21"	45.2
CNPVP4217ALA	3.5	3/8"	7/8"	17-1/2"	21-1/8"	21"	52
CNPVT4221ALA	3.5	3/8"	7/8"	21"	21-13/16"	21"	62
CNPVP4324ALA	3.5	3/8"	7/8"	24-1/2"	26-5/16"	21"	58
CNPVT4821ALA	4	3/8"	7/8"	21"	24-7/8"	21"	71
CNPVP4824ALA	4	3/8"	7/8"	24-1/2"	22-1/16"	21"	62
CNPVT6024ALA	5	3/8"	7/8"	24-1/2"	29-1/8"	21"	78
CNPVP6124ALA	5	3/8"	7/8"	24-1/2"	32-7/16"	21"	83.5



Standard Features

- Puron® R-410A refrigerant compatible
- Factory-installed Puron refrigerant TXV
- Both upflow and downflow applications with one SKU
- Painted cabinets match taupe metallic furnace color
- High-tech fin technology
- Durable - sloped - drain pan
- Aluminum coils incorporate advanced manufacturing techniques to provide the next generation solution to coil corrosion, including formicary corrosion

Limited Warranty*

- 10-year limited to original purchaser upon timely registration, otherwise 5 years
- * For residential applications. See warranty for full details.



Specifications

MODEL NUMBER	TONNAGE	TUBE CONNECTIONS (OD.)		UNIT DIMENSIONS (IN.)			APPROX. SHIP WT (LB)
		LIQUID LINE	SUCTION LINE	WIDTH	HEIGHT	DEPTH	
CNPHP2417ALA	2	3/8"	5/8"	19"	17-1/2"	20-3/4"	39.5
CNPHP3017ALA	2	3/8"	3/4"	22-1/16"	17-1/2"	20-3/4"	50
CNPHP3117ALA	2.5	3/8"	3/4"	27-1/2"	17-9/16"	20-3/4"	44.1
CNPHP3617ALA	2.5	3/8"	3/4"	22-1/16"	17-1/2"	20-3/4"	49.5
CNPHP4221ALA	2.5	3/8"	7/8"	22-1/16"	21"	20-3/4"	59
CNPHP4321ALA	3	3/8"	7/8"	30-1/8"	21-1/16"	20-3/4"	59.1
CNPHP4821ALA	3	3/8"	7/8"	28-1/16"	21"	20-3/4"	71
CNPHP6024ALA	3	3/8"	7/8"	29"	24-1/2"	20-3/4"	81
CNPHP6124ALA	3.5	3/8"	7/8"	29-1/16"	24-9/16"	20-3/4"	88



Standard Features

- Puron® R-410A refrigerant compatible
- Factory-installed Puron refrigerant TXV
- Dedicated line for horizontal application
- Painted cabinets to match taupe metallic furnace color
- High-tech fin technology
- New technology/FRTP - sloped - drain pan
- UV light knockouts in cabinets - from the factory
- Sturdy 22-gauge cabinet meet 2% air leakage
- Non-sweat cabinets at extreme conditions
- Easy slide out coils for inspection/replacement
- Easy inspection and coil cleaning from front of unit
- For cooling-only, coil can be installed in either airflow direction. Heat Pump applications require specific airflow direction to obtain performance.

Limited Warranty*

- 10-year limited to original purchaser upon timely registration, otherwise 5 years
- * For residential applications. See warranty for full details.

Limited stock, check your local branch for availability.



Specifications

MODEL NUMBER	TONNAGE	TUBE CONNECTIONS (OD.)		UNIT DIMENSIONS (IN.)			APPROX. SHIP WT (LB)
		LIQUID LINE	SUCTION LINE	WIDTH	HEIGHT	DEPTH	
CSPHP2412ALA	2	3/8"	5/8"	11-3/4"	28-3/8"	24-1/16"	55
CSPHP3012ALA	2.5	3/8"	3/4"	11-3/4"	28-3/8"	24-1/16"	56
CSPHP3612ALA	3	3/8"	3/4"	11-3/4"	28-3/8"	28-13/16"	61
CSPHP4212ALA	3.5	3/8"	3/4"	11-3/4"	28-3/8"	28-13/16"	63
CSPHP4812ALA	4	3/8"	7/8"	11-3/4"	30-3/8"	28-13/16"	65
CSPHP6012ALA	5	3/8"	7/8"	11-3/4"	30-3/8"	38-15/16"	82.5



Standard Features

- Puron® R-410A refrigerant pre-charged
- Easy installation design
- Corrosion-proof unit base
- Puron® R-410A refrigerant
- Class leading sound ratings
- Sloped drain for improved indoor air quality
- Scroll compressor
- Tin plated evaporator coil
- Front and side service access
- Louvered panel coil protection
- Cabinet air leakage less than 2.0% at 1.0 in. W.C. and cabinet air leakage less than 1.4% at 0.5 in W.C. when tested in accordance with ASHRAE standard 193

Limited Warranty*

- 10-year limited to original purchaser upon timely registration, otherwise 5 years
- * For residential applications. See warranty for full details.



Specifications

MODEL NUMBER	TONNAGE	UNIT DIMENSIONS (IN.)			APPROX. SHIP WT (LB)
		LENGTH	WIDTH	HEIGHT	
PH4ZNA024000--TP	2	51"	32"	30-1/8"	253
PH4ZNA030000--TP	2.5	51"	32"	34-1/8"	283
PH4ZNA036000--TP	3	51"	32"	34-1/8"	285
PH4ZNA042000--TP	3.5	51"	32"	42-1/8"	339
PH4ZNA048000--TP	4	51"	32"	42-1/8"	358
PH4ZNA060000--TP	5	51"	32"	42-1/8"	425

Electric Heater Kit

PART NUMBER	KW
CPHEATER128A02LC	7.5
CPHEATER130A02LC	10
CPHEATER131A02LC	15



Standard Features

- Puron® R-410A refrigerant pre-charged
- Up to 14.5 SEER
- Up to 12.0 EER
- 8.0 HSPF
- ECM Motor-Standard
- Stainless steel heat exchanger
- Tin plated evaporator coil
- Easy installation design
- Dense Wire Condenser Coil Guard-Standard
- Cabinet air leakage of 2.0% or less at 5 in. W.C. when tested in accordance with ASHRAE standard 193. (Low leak FIOP models only.)

Limited Warranty*

- 10-year limited to original purchaser upon timely registration, otherwise 5 years
- * For residential applications. See warranty for full details.



Specifications

MODEL NUMBER	TONNAGE	UNIT DIMENSIONS (IN.)			APPROX. SHIP WT (LB)
		LENGTH	WIDTH	HEIGHT	
PY4GNAE24060--TP	2	48 3/16	32 5/8	42 1/8	330
PY4GNAE30060--TP	2.5	48 3/16	32 5/8	44 1/8	342
PY4GNAE36090--TP	3	48 3/16	32 5/8	46 1/8	376
PY4GNAE42090--TP	3.5	48 3/16	44 1/8	44 3/4	463
PY4GNAE48115--TP	4	48 3/16	44 1/8	48 3/4	481
PY4GNAE60115--TP	5	48 3/16	44 1/8	52 3/4	509

LP Conversion Kit

PART NUMBER
CPLPCONV014A00



Included



Optional

Standard Features

- Sizes: 09 / 12 / 18 / 24
- Available in 115V and 208/230V
- Up to 19.8 SEER and 10.6 HSPF when paired with 38MHRBQ outdoor unit
- Modes: Cool, Heat, Dry, Fan, Auto
- Turbo Mode
- Up-down louver control (fixed or swing)
- Remove filter from the top
- Improved serviceability
- Four fan speeds
- Sleep Mode
- Follow Me (senses temperature at handheld remote)
- Heating Setback (46° F Heating Mode)
- Quiet indoor operation, as low as 28 dB(A)
- Aluminum Golden Hydrophilic pre-coated fins
- Wireless Remote Controller included with indoor unit
- Optional Wired Remote Controller KSACN0401AAA
- 24V Interface available for compatibility with conventional thermostat
- Wi-Fi® Kit Available

Limited Warranty*

- 10-year limited to original purchaser upon timely registration, otherwise 5 years
- * For residential applications. See warranty for full details.

Specifications

MODEL NUMBER	COMPATIBLE OUTDOOR MODEL	TONNAGE	SEER	EER	HSPF	MCA / MOPA	VOLTAGE
40MHHQ09---3	38MHRBQ09AA3	0.75	18.5	11.2	10.0	8A / 15A	208/230V
40MHHQ12---1	38MHRBQ12AA1	1	19.8	10.0	10.6	13A / 20A	115V
40MHHQ12---3	38MHRBQ12AA3	1	19.8	11.2	9.6	10A / 15A	208/230V
40MHHQ18---3	38MHRBQ18AA3	1.5	19.0	11.2	10.6	15A / 20A	208/230V
40MHHQ24---3	38MHRBQ24AA3	2	17.3	9.7	9.6	18A / 25A	208/230V



Standard Features

- Puron® R-410A refrigerant pre-charged
- Rotary Inverter Compressor
- Up to 19.8 SEER
- 10.6 HSPF
- Sizes: 09 / 12 / 18 / 24
- Cost-Effective
- Rapid Cooling & Heating
- Available in 115V and 208/230V
- Built-in basepan heater on Heat Pump units
- Auto-restart function
- Refrigerant leakage detection
- Quiet outdoor operation, as low as 52 dB(A)
- Aluminum Golden Hydrophilic pre-coated fins
- Piping length 82 – 164 ft.
- Cooling operating range 0° – 122° F
- Heating operating range 0° – 86° F

Limited Warranty*

- 10-year limited to original purchaser upon timely registration, otherwise 5 years
- * For residential applications. See warranty for full details.

Specifications

MODEL NUMBER	COMPATIBLE INDOOR MODEL	TONNAGE	SEER	EER	HSPF	MCA / MOPA	VOLTAGE
38MHRBQ09AA3	40MHHQ09---3	0.75	18.5	11.2	10.0	8A / 15A	208/230V
38MHRBQ12AA1	40MHHQ12---1	1	19.8	10.0	10.6	13A / 20A	115V
38MHRBQ12AA3	40MHHQ12---3	1	19.8	11.2	9.6	10A / 15A	208/230V
38MHRBQ18AA3	40MHHQ18---3	1.5	19.0	11.2	10.6	15A / 20A	208/230V
38MHRBQ24AA3	40MHHQ24---3	2	17.3	9.7	9.6	18A / 25A	208/230V



Wi-Fi® Kit
Part# KSAIF0101AAA

Ductless Controls for 40MHHQ High Wall Units

PART #	DESCRIPTION
KSAIF0101AAA	Wi-Fi® Kit for 0.75 ton, 1 ton, & 2 ton models
KSAIF0201AAA	Wi-Fi® Kit for 1.5 ton model only
KSAIC0301230	24V Interface (2nd Gen) – All Sizes <i>*115V Model requires transformer</i>



Mini 115V Condensate Pump
Part# SI3000-115V

Sauermann Mini Condensate Pumps

PART #	DESCRIPTION
SI3000-115V	Mini 115V Condensate Pump
SI3000-230V	Mini 230V Condensate Pump



Maxi Blue 230V Condensate Pump
Part# X87-721

Blue Diamond Condensate Pumps

PART #	DESCRIPTION
X87-721	Maxi Blue 230V Condensate Pump
X85-003	Micro Blue 110/230V Condensate Pump – All Sizes up to 1.5 ton

Ductless Linesets

High grade flexible refrigeration grade copper linesets. Both tubes are fully insulated separately with black UV resist foam insulation. Lines are tied together every 5 feet with plastic strap. All 4 ends are flared, include flare nuts and are mounted and protected with plastic insert (no other parts).



PART #	FOR USE WITH MODELS	LENGTH	TUBE SIZE	INSULATION
MSLS-14LS38-25-12	40MHHQ009-1,3	25'	1/4" x 3/8"	1/2"
MSLS-14LS38-50-12	40MHHQ009-1,3	50'	1/4" x 3/8"	1/2"
MUELLER-MS14X38X25	40MHHQ009-1,3	25'	1/4" x 3/8"	1/2"
MUELLER-MS14X38X50	40MHHQ009-1,3	50'	1/4" x 3/8"	1/2"
MUELLER-MS14X38X65	40MHHQ009-1,3	65'	1/4" x 3/8"	1/2"
MSLS-14LS12-25-12	40MHHQ0012,17,18-1,3	25'	1/4" x 1/2"	1/2"
MSLS-14LS12-50-12	40MHHQ0012,17,18-1,3	50'	1/4" x 1/2"	1/2"
MSLS141212T-65	40MHHQ0012,17,18-1,3	65'	1/4" x 1/2"	1/2"
MUELLER-MS14X12X25	40MHHQ0012,17,18-1,3	25'	1/4" x 1/2"	1/2"
MUELLER-MS14X12X50	40MHHQ0012,17,18-1,3	50'	1/4" x 1/2"	1/2"
MUELLER-MS14X12X65	40MHHQ0012,17,18-1,3	65'	1/4" x 1/2"	1/2"
MSLS-38LS58-25-12	40MHHQ024-3	25'	3/8" x 5/8"	1/2"
MSLS-38LS58-50-12	40MHHQ024-3	50'	3/8" x 5/8"	1/2"
MPLS385812T-100	40MHHQ024-3	100'	3/8" x 5/8"	1/2"
MUELLER-MS38X58X25	40MHHQ024-3	25'	3/8" x 5/8"	1/2"
MUELLER-MS38X58X50	40MHHQ024-3	50'	3/8" x 5/8"	1/2"
MUELLER-MS38X58X65	40MHHQ024-3	65'	3/8" x 5/8"	1/2"
MUELLER-MS38X58X100	40MHHQ024-3	100'	3/8" x 5/8"	1/2"

NOTE: Check local availability for inventory. Not all linesets are stocked in all locations. Check HVAC Partners for maximum lineset lengths.

Ductless Lineset Covers

Put a professional finish on air conditioning installations with an easy to install modular system that covers and protects linesets, drain lines and wiring.



PART #	DESCRIPTION
LDK92W	Rector Seal 84005 – Lineset Fortress 3.5" x 12"
DT-230-CP3	3" Union Coup B-10, Diversitech
DT-230-WC3	3" Wall Cover B-10, Diversitech
DT-230-EB4	4" 90 Deg Inside Elbow B-10, Diversitech
DT-230-EIN4	4" 90 Deg Outside Elbow B-10, Diversitech
DT-230-D3	3" Speedichannel 6/Bx
DT-230-IC3	3" Speedichannel Kit – includes 3 Pcs of 48" Channel
DT-230-IC4	4" Speedichannel Kit – includes 3 Pcs of 48" Channel
DT-230-LFB4	4" 90 Degree large turn bend 10 pack
DT-230-SF4	4" Soffit fitting 10 pack
DT-230-TJ4	4" T Joint 10 pack

Navigating the HVAC industry can be tricky

We understand the challenges HVAC professionals face and we help solve them on a daily basis. Since 1939, Mingledorff's has invested in solutions to ensure their continued success. We offer exclusive HVAC and plumbing products and our entire team is dedicated to helping you be the go-to service provider in your area.



Parts & Supplies
Fully stocked distribution centers and knowledgeable sales professionals providing superior customer service.



Sales & Support
Economical and effective results through equipment selections, and application advice, with creative solutions to unique challenges.



Technical Services
An award winning team of Technical Service Managers ready to provide information and assistance.



Training & Events
Year round training and customer appreciation events to help you maintain your HVAC confidence.



Stop by one of our 35 locations for seasonal in-store promotions.

In the meantime, visit mingledorffs.com to learn how we equip HVAC professionals to succeed.



WE EQUIP HVAC PROFESSIONALS TO SUCCEED.

www.mingledorffs.com

Location Name	Address	City	State	Zip	Phone	Store ID
Albany	205 Baldwin Drive	Albany	GA	31707	(229) 432-5254	48
Anniston	105 E. D Street	Anniston	AL	36201	(256) 241-3026	86
Athens/Bogart	105 Whitetail Way	Bogart	GA	30622	(706) 548-2563	36
Atlanta	1290 Tacoma Dr.	Atlanta	GA	30318	(404) 875-7755	34
Auburn	2295 1st Ave	Opelika	AL	36801	(334) 734-8011	47
Augusta	3618 Wrightsboro Rd.	Augusta	GA	30909	(706) 651-1950	64
Birmingham	3230-C Airport Hwy.	Birmingham	AL	35222	(205) 250-7714	81
Brunswick	275 Rose Dr.	Brunswick	GA	31520	(912) 265-5193	73
Columbus	6201 West Hamilton Park Dr.	Columbus	GA	31909	(706) 322-3870	46
Conyers	335 Gee's Mill Business Pkwy.	Conyers	GA	30013	(770) 918-9132	38
Dothan	205 Wedgewood Dr.	Dothan	AL	36303	(334) 836-1035	54
Forest Park	5158 Kennedy Rd., Suite C	Forest Park	GA	30297	(404) 361-2474	24
Fort Walton	76 Beal Pkwy. SW	Ft. Walton Beach	FL	32548	(850) 244-2019	58
Gainesville	2472 Hilton Drive	Gainesville	GA	30501	(770) 297-9335	32
Gulf Shores	820 Commerce Dr.	Gulf Shores	AL	36542	(251) 968-2660	53
Hattiesburg	1851 Lincoln Rd.	Hattiesburg	MS	39401	(601) 579-9670	55
Hilton Head	21-A Hunter Road	Hilton Head	SC	29926	(843) 689-3404	66
Huntsville	391 Nick Fitchheard Rd.	Huntsville	AL	35806	(256) 859-2691	82
Lawrenceville	2111 Cedar Rd., Bldg. A	Lawrenceville	GA	30043	(678) 442-1060	28
Lithia Springs	320 Thorton Rd. #106	Lithia Springs	GA	30122	(770) 948-3451	37
Loxley	30020 County Road 49	Loxley	AL	36551	(251) 964-2707	52
Macon	5527 Thomaston Road	Macon	GA	31220	(478) 474-8544	41
Marietta	1060-D Triad Ct.	Marietta	GA	30062	(770) 426-0551	22
Mobile	5522 W Commerce Blvd	Mobile	AL	36619	(251) 476-6285	51
Montgomery	861 Plantation Way	Montgomery	AL	36107	(334) 262-4855	49
Muscle Shoals	107 Commerce Street	Muscle Shoals	AL	35661	(256) 383-6904	83
Newnan	70 Enterprise Ct.	Newnan	GA	30265	(770) 239-2105	27
Norcross	6675 Jones Mill Ct	Norcross	GA	30092	(770) 239-2100	21
Ocean Springs	5717 Suntec Dr., Sunplex Ind. Park	Ocean Springs	MS	39564	(228) 497-5090	56
Panama City	3012 Lisenby Ave	Panama City	FL	32405	(850) 913-0585	57
Pensacola	4405 North Palafox Street	Pensacola	FL	32505	(850) 438-1005	59
Savannah	103 Central Junction Dr.	Savannah	GA	31405	(912) 232-1228	61
Statesboro	126-A West Parrish St.	Statesboro	GA	30458	(912) 764-8841	68
Valdosta	363 Connell Road	Valdosta	GA	31602	(229) 245-8200	72
Warner Robins	110 Byrd Way	Warner Robins	GA	31088	(478) 953-3727	44

